

# XKP-06 (> 1.0kW ) Swimming pool pump >1,0kw

## Application

- Suitable for water circulation in small and medium swimming pools. Lightly dirty water with suspended particles will be perfectly filtered


## Pompe

- Plastic body pump
- AISI 304 stainless steel shaft
- Maximum liquid temperature: +35°C
- Maximum suction height: 3.5 m

## Moteur

- Copper winding motor or aluminium
- Integrated thermal protection for single-phase motors
- Insulation class: F
- Protection class: IPX5


## Identification codes

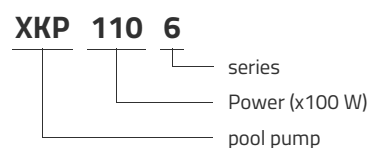

## Technical data


MODEL	kW	Q (m <sup>3</sup> /h)						
		0	6	12	18	24	30	
		Q (l/min)	0	100	200	300	400	500
XKP1106	1.1		16	15.3	12.3	7.2		
XKP1606	1.6		18	17.7	15.6	11.6	6.2	
XKP2206	2.2		19.5	19	17.2	123.6	8.6	2.2

## Dimensions

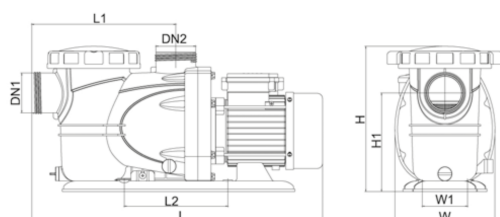

MODEL	DN1	DN2	L	W	H	L1	W1	H1
XKP1106	50	50	553	190	278	274	197	187
XKP1606	50	50	553	190	278	274	197	187
XKP2206	50	50	583	190	278	274	197	187

## Hydraulic performance

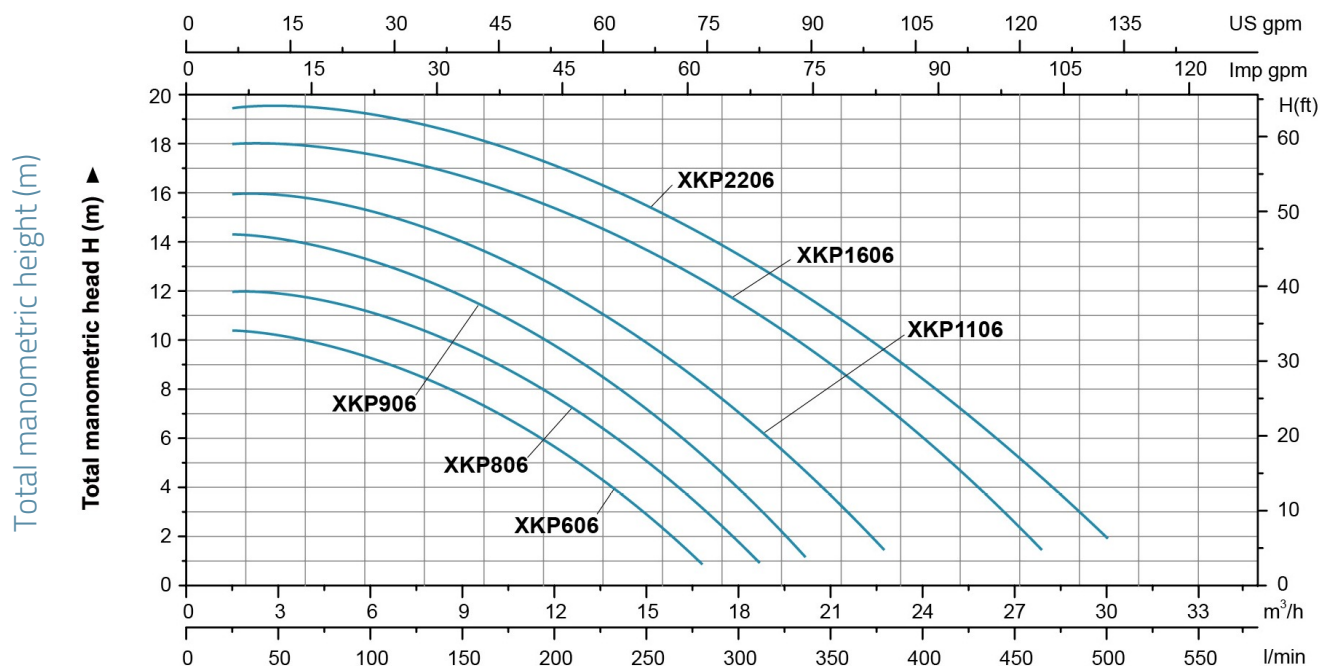

## Packaging

MODEL	Weight (kg)	Length L (mm)	Width W (mm)	Height H (mm)
XKP1106	12.1	575	225	255
XKP1606	15.2	605	225	255
XKP2206	16.8	605	225	255

