

XKP-06 (> 1.0kW) Swimming pool pump >1,0kw

Application

- Suitable for water circulation in small and medium swimming pools. Lightly dirty water with suspended particles will be perfectly filtered

Pompe


- Plastic body pump
- AISI 304 stainless steel shaft
- Maximum liquid temperature: +35°C
- Maximum suction height: 3.5 m

Moteur

- Copper winding motor or aluminium
- Integrated thermal protection for single-phase motors
- Insulation class: F
- Protection class: IPX5

Códigos de identificación


XKP 110 6



Datos técnicos


MODEL	kW	Q (m ³ /h)	0	6	12	18	24	30
		Q (l/min)	0	100	200	300	400	500
XKP1106	1.1	16	15.3	12.3	7.2			
XKP1606	1.6	18	17.7	15.6	11.6	6.2		
XKP2206	2.2	19.5	19	17.2	123.6	8.6	2.2	

Dimensiones

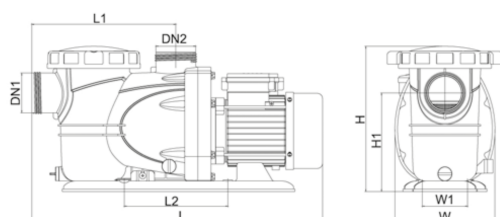

MODEL	DN1	DN2	L	W	H	L1	W1	H1
XKP1106	50	50	553	190	278	274	197	187
XKP1606	50	50	553	190	278	274	197	187
XKP2206	50	50	583	190	278	274	197	187

Rendimiento hidráulico

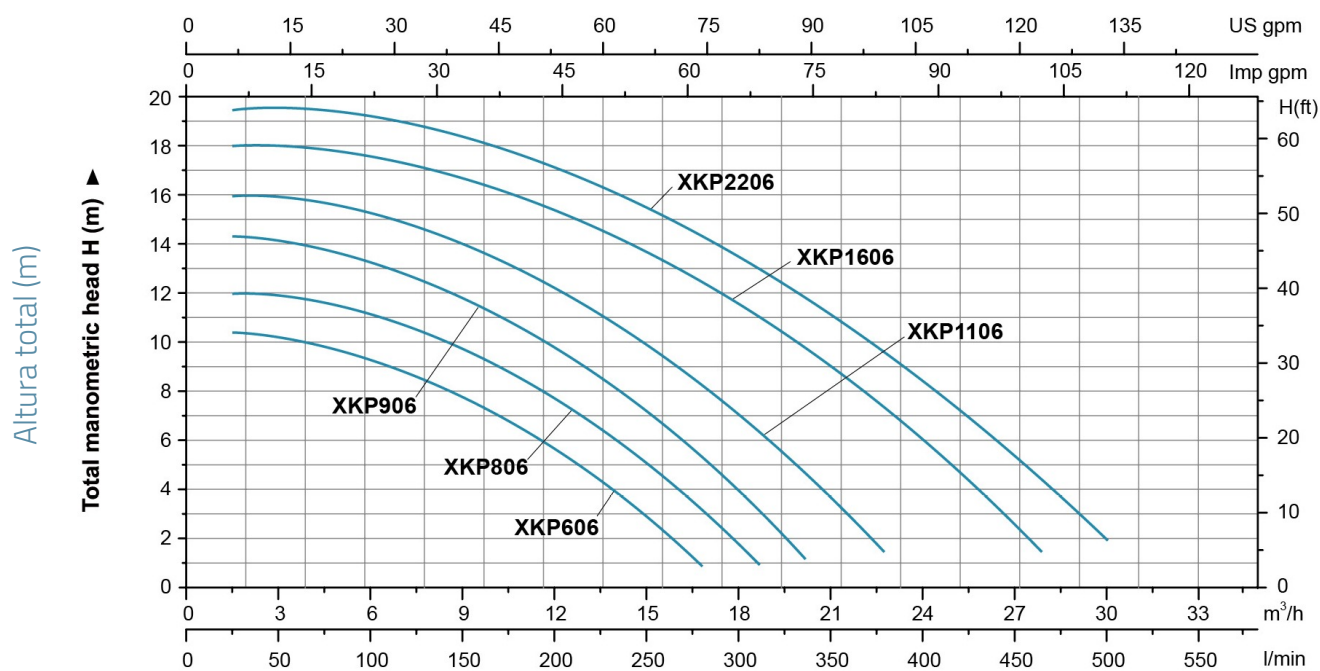

Packaging

MODEL	Peso (kg)	Longitud L (mm)	Anchura W (mm)	Altura H (mm)
XKP1106	12.1	575	225	255
XKP1606	15.2	605	225	255
XKP2206	16.8	605	225	255

