

# XKP-06 (<1.0kW) Swimming pool pump < 1,0 kW

## Application

- Suitable for water circulation in small and medium swimming pools. Lightly dirty water with suspended particles will be perfectly filtered


## Pompe

- Plastic body pump
- AISI 304 stainless steel shaft
- Maximum liquid temperature: +35°C
- Maximum suction height: 3.5 m

## Moteur

- Copper winding motor or aluminium
- Integrated thermal protection for single-phase motors
- Insulation class: F
- Protection class: IPX5


## Codici identificativi

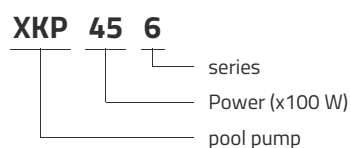

## Dati tecnici


MODEL	kW	Q (m <sup>3</sup> /h)	0	3	6	9	12	15
			Q (l/min)	0	50	100	150	200
XKP256	0.25	7.5	6.3	2.9				
XKP306	0.3	8.5	6.3	2.9				
XKP356	0.35	9.5	8.2	6.2	1.5			
XKP456	0.45	10.3	9.2	7.2	4.1			
XKP556	0.55	12	11	9.9	8	5.5		
XKP856	0.85	12.5	12.4	11.8	10.5	8.5	6	

## Dimensioni

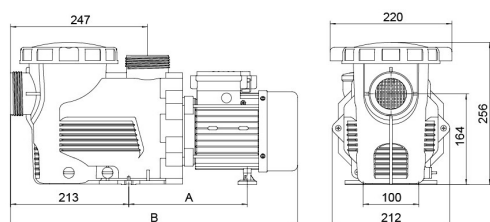

MODEL	A	B
XKP256	157.5	374
XKP306	157.5	374
XKP356	157.5	374
XKP456	157.5	374
XKP556	188.5	405
XKP856	188.5	405

## Prestazioni idrauliche

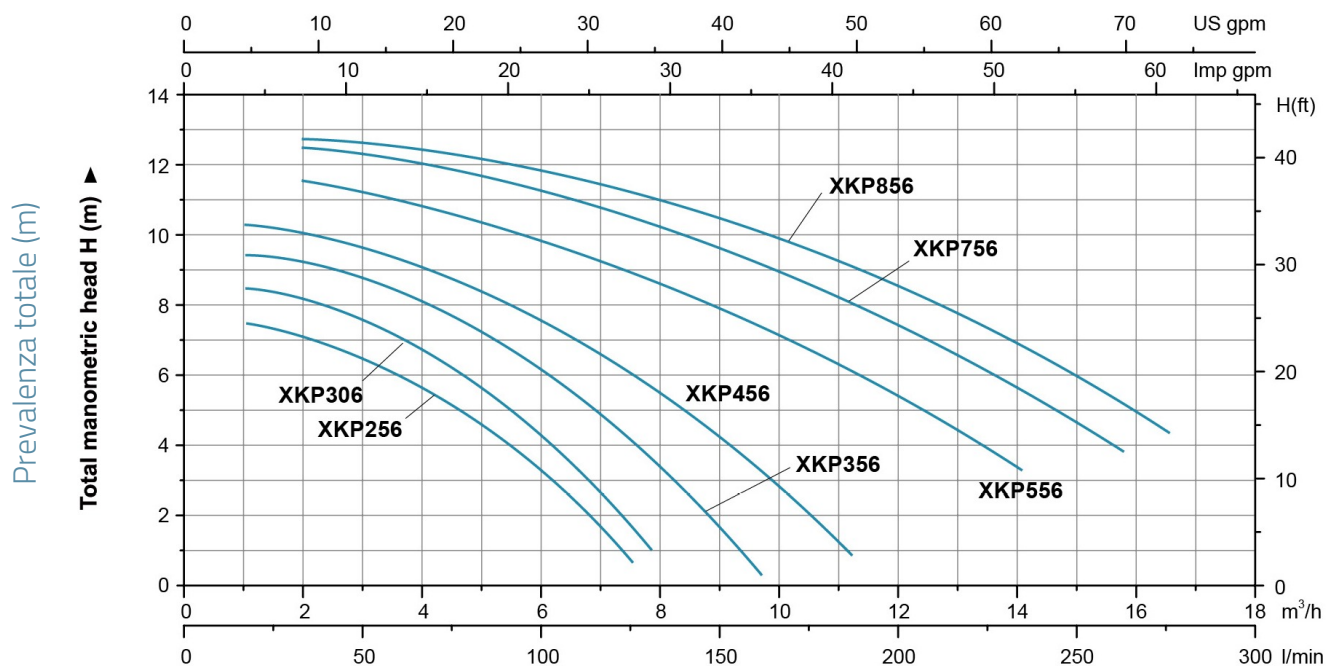

## Packaging

MODEL	Peso (kg)	Lunghezza L (mm)	larghezza W (mm)	Altezza H (mm)
XKP256	5.4	410	170	200
XKP306	6	410	170	200
XKP356	5.8	410	170	200
XKP456	6.1	410	170	200
XKP556	6.4	410	170	200
XKP856	7.4	410	170	200

