

4LST35 Borehole pump



Application

- For water supply from wells or reservoirs
- For domestic use and industrial applications
- For garden use and irrigation


Pompe

- Max fluid temperature: +35°C
- Max solid content: 0.3%
- Max chlorine content: 400 mg/L
- PH va1ue:6.9
- Max immersion: 150 m
- Min well diameter: 4"

Moteur

- 4" motor in compliance with NEMA standards
- All parts meet ROHS and PAHS
- Power range: 0.37 kW (0.5 HP) 7.5 kW (10 HP)
- AISI 304 pump body
- AISI 304 shaft
- AISI 304 connector
- AISI 304 coupling

Identification codes

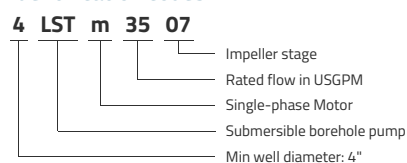

Technical data

MODEL	kW	Q (m³/h)									
		0	3	3.6	4.2	4.8	5.4	6	7.2	8.4	
		Q (l/min)									
		0	50	60	70	80	90	100	120	140	
4LSTm-3507	0.75	42	36	34	32	30	27	25	18	10	
4LSTm-3510	1.1	60	51	48	46	43	40	36	26	14	
4LSTm-3514	1.5	86	71	67	65	60	56	50	36	19	

Dimensions



MODEL	H	L	NettoWeightH	NettoWeightL	GrossWeight	GrossWeight
4LSTm-3507	395	773	3.4	12.4	10.2	10.2
4LSTm-3510	488	930	4.2	15.2	11.3	11.3
4LSTm-3514	612	1084	5.2	17.6	12.7	12.7