

4XR 8 Stainless steel body drilling pump



Application

- Pumping for drilling, well, tank
- For domestic (watering, irrigation) or industrial applications

Pompe


- Maximum liquid temperature: +35°C
- Maximum sand content: 0,25%
- Maximum immersion depth: 80 m
- Minimum borehole diameter: 4"
- Curved tolerance in accordance with the standard ISO 9906

Moteur

- Rewindable motor

Identification codes

4 XR m 8 /11 -0.25

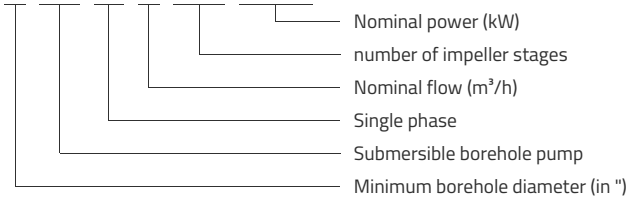

Technical data

MODEL	kW	Q (m³/h)	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8
		Q (l/min)	0	20	40	60	80	100	120	140	160	180
4XRm8/7-0.75	0.75	44	43	39	37	35	33	30	26	20	13	
4XRm8/9-1.1	1.1	57	55	51	47	45	43	39	33	26	17	
4XRm8/12-1.5	1.5	76	73	67	63	60	57	52	44	34	22	
4XR8/12-1.5	1.5	76	73	67	63	60	57	52	44	34	22	
4XRm8/17-2.2	2.2	107	104	96	90	85	81	74	63	48	31	
4XR8/17-2.2	2.2	107	104	96	90	85	81	74	63	48	31	
4XR8/23-3	3	145	141	129	121	115	109	100	85	65	42	
4XR8/29-4	4	183	177	163	153	145	138	126	107	82	53	
4XR8/37-5.5	5.5	234	226	208	195	185	176	160	136	105	68	
4XR8/45-7.5	7.5	284	275	253	237	225	214	195	166	128	83	
4XRm8/5-0.55	0.55	32	31	28	26	25	24	22	18	14	9	
4XR8/5-0.55	0.55	32	31	28	26	25	24	22	18	14	9	
4XR8/7-0.75	0.75	44	43	39	37	35	33	30	26	20	13	
4XR8/9-1.1	1.1	57	55	51	47	45	43	39	33	26	17	

Dimensions

MODEL	DN1	DN2	P	M	T	poidsP	poidsM	poidsT
4XRm8/7-0.75	2	2	494	359	853	3.6	8.7	12.3
4XRm8/9-1.1	2	2	570	399	969	4.2	10.6	14.8
4XRm8/12-1.5	2	2	717	449	1165	5.1	12.9	18
4XR8/12-1.5	2	2	717	424	1141	5.1	11.7	16.8
4XRm8/17-2.2	2	2	907	542	1449	6.6	17.7	24.3
4XR8/17-2.2	2	2	907	514	1421	6.6	15.7	22.3
4XR8/23-3	2	2	1136	594	1730	8.4	19.8	28.2
4XR8/29-4	2	2	1396	698	2094	10.1	23.7	33.8
4XR8/37-5.5	2	2	1701	788	2189	12.5	28	40.5
4XR8/45-7.5	2	2	2037	908	2945	14.9	34	48.9
4XRm8/5-0.55	2	2	418	329	747	3	7.3	10.3
4XR8/5-0.55	2	2	418	329	747	3	7.3	10.3
4XR8/7-0.75	2	2	494	344	838	3.6	8	11.6
4XR8/9-1.1	2	2	570	379	949	4.2	9.8	14