

LKS-PSW Powerful Submersible Drainage Pump



Application

- Suitable for pumping dirty water containing particles with maximum up to 35mm.


Pompe

- High-quality and robust stainless steel housing.
- Adjustable handle for easy and reliable positioning of the float in different positions.

Moteur

- Motor with thermal protector.

Identification codes

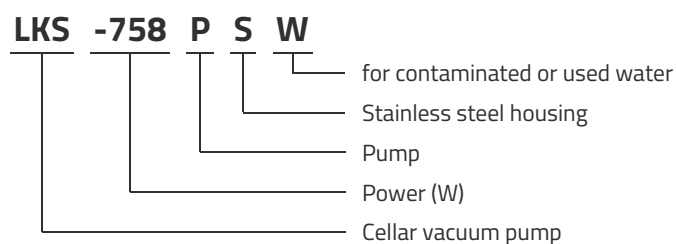

Technical data

MODEL	kW	Q (m ³ /h)	1	8	16
		Q (l/min)	17	133	267
LKS-758PSW - without floatswitch	0.75	9	5	1	
LKS-758PSW - with floatswitch	0.75	9	5	1	

Hydraulic performance

